

Digiquartz® Broadband Barometers



Model 6000-16B Intelligent Barometer



Model 745-16B Laboratory Barometric Standard



Model 765-16B Field Barometric Standard

PERFORMANCE

±0.08 hPa Accuracy
0.0001% Resolution
Better than 0.1 hPa Stability

RANGES

500 hPa to 1100 hPa (Models 745 & 765)
800 hPa to 1100 hPa (Model 6000-16B)

FEATURES

Taring
Low Power
Data logging (Model 765)
Remote communication interface
- RS-232 (All Models)
- RS-485 (Series 6000-16B)
- USB (Model 765)
Free configuration and logging software
Battery operation (Models 745 & 765)
Simple front panel (Models 745 & 765)

QUALITY AND STANDARDS


NIST traceable
Low maintenance
3-year stability warranty
ISO 9001:2000 quality system
Market-leading 5-year limited warranty

APPLICATION AREAS

Metrology
Aerospace
Meteorology
Oceanography
Process Control
Energy Exploration
Infrasound Research
Reference Barometers
Altimeter Setting Indicators
Laboratory Instrumentation

Digiquartz® Broadband Intelligent Barometers and Barometric Standards provide the ultimate accuracy in pressure measurements. Typical application accuracy of ±0.08 hPa is achieved under laboratory and field conditions. Digiquartz® Broadband Barometers are used for applications where **accuracy, reliability, long-term stability and low total cost of ownership** are critical parameters.

Paroscientific is certified to the ISO 9001:2000 International Quality Standards. Our quality system and commitment to excellence ensure customers of outstanding products and services. We offer a **3-year stability warranty** on all broadband barometers and a market-leading **5-year limited warranty** on all Digiquartz® Transducers with the first two years covered at 100%.



Paroscientific, Inc.
Digiquartz® Pressure Instrumentation



Digiquartz® Broadband Barometers

PERFORMANCE

Accuracy	Better than ± 0.08 hPa
Resolution	Better than 0.001 hPa
Stability	Better than 0.1 hPa per year


CHARACTERISTICS

Weight	Model 6000-16B - 15.9 oz (450 g) Max
	Model 745-16B - 4.0 lb (1.8 Kg) Max
	Model 765-16B - 8.5 lb (3.86 Kg) Typical

ENVIRONMENTAL


Overpressure	To 1240 hPa (18 psia)
Operating Temp. Range	Model 6000-16B -54 °C to +60 °C (-65 °F to +140 °F)
	Model 745-16B 0 °C to +40 °C (32 °F to +104 °F)
	Model 765-16B -20 °C to +50 °C (-4 °F to +122 °F)
Power Requirements	Model 6000-16B +6 VDC to +16 VDC, 32 mA Max
	Model 745-16B +6 to +25 VDC or AA batteries, 72 mA
	Model 765-16B 100 VAC or 240 VAC or internal battery

HIGH PERFORMANCE PRESSURE PORT


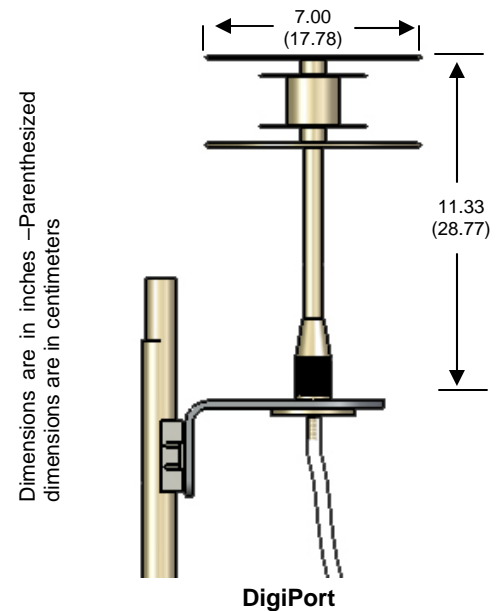


Accurate measurements of barometric pressure require an environmentally rugged pressure port design that minimizes pressure errors under dynamic wind conditions. Wind tunnel and field tests of the high-performance pressure port (DigiPort) used on the Paroscientific MET3A Meteorological System show superior performance over all other ports. Barometric readings with the MET3A pressure port system easily meet the requirements of GPS Meteorology, Weather Stations, Digital Altimeter Setting Indicators, High-Resolution Measurements of Atmospheric Waves, and Aircraft Wake-Turbulence Detection.



The high-performance DigiPort is now optionally available for use with all Digiquartz® Barometric Instruments. It provides barometric accuracy of better than 0.08 hPa in strong winds, all wind directions, pitch or tilt angles up to 25 degrees, rain, and freezing conditions.



Series 6000-16B

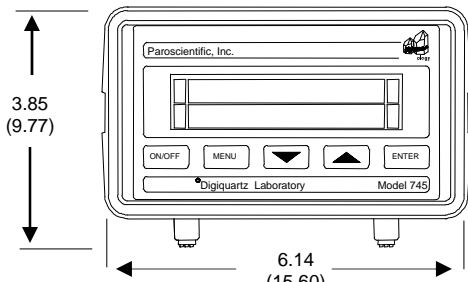

Model 745-16B

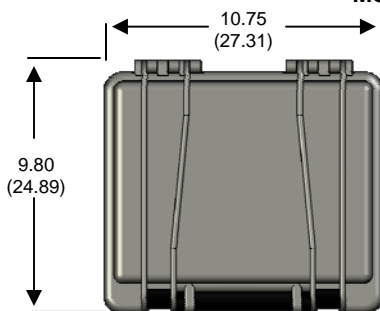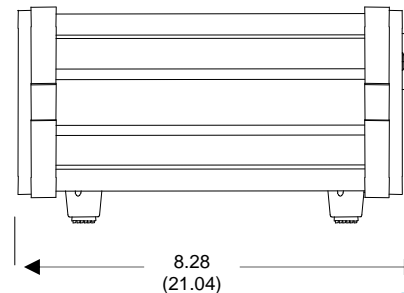

Model 765-16B



ACCESSORIES

High performance pressure port (DigiPort)
Model 715 Display

ORDERING INFORMATION

Digiquartz® Broadband Barometers		
Model Number	Part Number	Remarks
6000-16B	1600-101	Stainless steel buffer tube
	1600-102	Nylon buffer tube
745-16B	1728-010	110 VAC input
	1728-110	220 VAC input
765-16B	1100-010	110/220 VAC input

Paroscientific, Inc.

4500148th Ave. N.E. Redmond, WA, USA 98052
Telephone: (425) 883-8700 Facsimile: (425) 867-5407
E-mail: support@paroscientific.com Web: www.paroscientific.com